


DISTANZIATORI MULTI-ASOLA



Asole														cm 15	cm 20	cm 25	cm 30	cm 35	cm 40	cm 45	cm 50	cm 55	cm 60	cm 65	cm 70	cm 75	cm 80	cm 85	cm 90	cm 95	cm 100
A	B	C	D	E	F	G	H	I	L	M	N																				
X	X											15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100		
	X	X										7	12	17	22	27	32	37	42	47	52	57	62	67	72	77	82	87	92		
	X		X									-	8.5	13.5	18.5	23.5	28.5	33.5	38.5	43.5	48.5	53.5	58.5	63.5	68.5	73.5	78.5	83.5	88.5		
	X			X								-	-	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85		
X					X							8.5	13.5	11.5	16.5	21.5	26.5	31.5	36.5	41.5	46.5	51.5	56.5	61.5	66.5	71.5	76.5	81.5	86.5		
X						X						-	-	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90		
X							X					-	-	18.5	23.5	28.5	33.5	38.5	43.5	48.5	53.5	58.5	63.5	68.5	73.5	78.5	83.5	88.5	93.5		
X										X		-	-	-	-	-	19.5	24.5	29.5	34.5	39.5	44.5	49.5	54.5	59.5	64.5	69.5	74.5	79.5		
X											X	-	-	-	13	18	23	28	33	38	43	48	53	58	63	68	73	78.5	83		
	X							X				-	-	-	-	16.5	21.5	26.5	31.5	36.5	41.5	46.5	51.5	56.5	61.5	66.5	71.5	76.5	81.5		
	X								X			-	-	-	-	-	18	3	28	33	38	43	48	53	58	63	68	73	78		

► RESISTENZA MECCANICA MINIMA GARANTITA 70 Kg/mm²

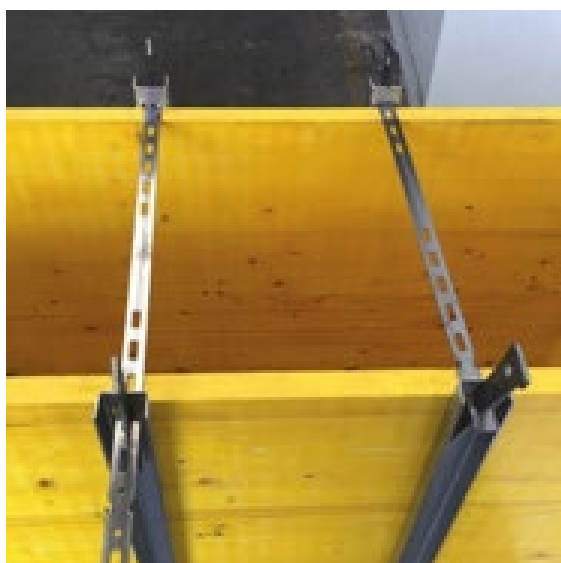

► CONFEZIONE 100 PEZZI PARALLELIZZATI
CON PVC TERMORITRAIBILE



► PEDANE 100 CONFEZIONI
MINIMO INGOMBRO E FACILE STIVAGGIO